




## Standard Compression Gas Springs with Clevis End Fittings

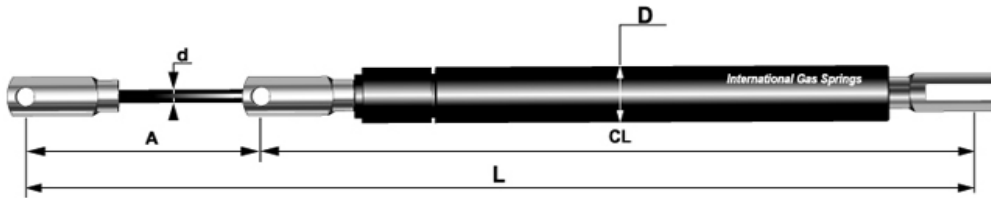

### Features & Benefits

- \*Black Nitride Shafts
- \*Available from Stock
- \*End of Travel Dampening

- \*Orbital riveted piston assy.
- \*Selection of Force Ratings
- \*Optional End Fittings Available

#### INCH DIMENSIONS

Gas Spring	P/N	Rod Dia.: (d)	Cyl. Dia.: (D)	Stroke: (A)	Extended Length (L)	Compressed Length (CL)	Clevis Eye Diameter	Force (Lbs.)
66U057151CC****		.236	.590	2.25	7.97	5.72	6mm	10 to 90 Lbs.
66U060184CC****		.236	.590	2.4	9.12	6.72	6mm	10 to 90 Lbs.
66U076214CC****		.236	.590	3	10.47	7.47	6mm	10 to 90 Lbs.
66U089264CC****		.236	.590	3.5	12.47	8.97	6mm	10 to 90 Lbs.
66U100264CC****		.236	.590	3.9	12.47	8.57	6mm	10 to 90 Lbs.
66U140341CC****		.236	.590	5.5	15.47	9.97	6mm	10 to 90 Lbs.
66U150364CC****		.236	.590	5.9	16.22	10.32	6mm	10 to 90 Lbs.
66U153392CC****		.236	.590	6	17.47	11.47	6mm	10 to 90 Lbs.
66U178396CC****		.236	.590	7	17.47	10.47	10mm	10 to 90 Lbs.
66U184434CC****		.236	.590	7.25	18.97	11.72	10mm	10 to 90 Lbs.
66U203468CC****		.236	.590	8	20.47	12.47	6mm	10 to 90 Lbs.
89U057151CC****		.236	.590	2.25	7.97	5.72	6mm	20 to 150 Lbs.
8AU080194CC****		.314	.748	3.14	10.07	6.93	6mm	20 to 160 Lbs.
8AU089264CC****		.314	.748	3.5	12.47	8.97	6mm	20 to 160 Lbs.
89U100268CC****		.314	.708	3.9	12.47	8.57	6mm	20 to 150 Lbs.
89U150368CC****		.314	.708	5.9	16.37	10.47	6mm	20 to 150 Lbs.
8AU153392CC****		.314	.748	6	17.47	11.47	6mm	20 to 160 Lbs.
89U184434CC****		.315	.708	7.25	18.97	11.72	6mm	21 to 150 Lbs.
89U200463CC****		.314	.708	7.9	20.11	12.21	6mm	20 to 160 Lbs.
8AU203468CC****		.314	.748	8	20.47	12.47	6mm	20 to 160 Lbs.
89U250568CC****		.314	.708	9.8	24.22	14.42	6mm	20 to 150 Lbs.
8AU276633CC****		.314	.748	11	26.97	15.97	6mm	20 to 160 Lbs.
1CU203468CC****		.393	.866	8	20.19	12.19	8mm	101 to 250 Lbs.
1CU292671CC****		.393	.866	11.5	28.16	16.66	8mm	100 to 250 Lbs.
1CU350745CC****		.393	.866	13.77	31.37	17.59	8mm	100 to 250 Lbs.
1CU406864CC****		.393	.866	16	35.90	19.90	6mm	100 to 250 Lbs.
1CU416885CC****		.393	.866	16.375	36.71	20.33	8mm	100 to 250 Lbs.

\*\*\*\* 4 digit code which references the force in Newtons (lbs. x 4.448 =Newtons)

Example: 150 lbs. force = 667 Newtons or P/N suffix "0667"

P/N 8AU203468BB0667 = .314" Rod x 8" stroke, composite ball joint ends & 150 lbs. of force

"CC" = Clevis end fittings

"JJ" = Metal ball joint end fittings

\*Stock Items In Bold

**For the SOLUTION TO YOUR GAS SPRING NEEDS**