


Standard Compression Gas Springs with Metal Ball Socket End Fittings

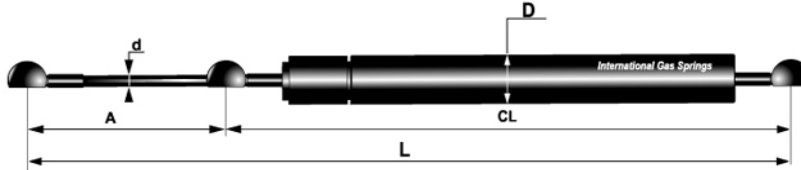

Features & Benefits

- *Black Nitride/Chrome Shafts
- *Available from Stock
- *End of Travel Dampening
- *Orbital riveted piston assy.
- *Selection of Force Ratings
- *Composite & Steel End Fittings

INCH DIMENSIONS

Gas Spring	P/N	Rod Dia.: (d)	Cyl. Dia.: (D)	Stroke: (A)	Extended Length (L)	Compressed Length (CL)	Ball Socket Dia.	Force (Lbs.)
66U057151JJ****		.236	.590	2.25	7.50	5.25	10mm	10 to 90 Lbs.
66U060184JJ****		.236	.590	2.4	8.70	6.3	10mm	10 to 90 Lbs.
66U076214JJ****		.236	.590	3	10.00	7	10mm	10 to 90 Lbs.
66U089264JJ****		.236	.590	3.5	12.00	8.5	10mm	10 to 90 Lbs.
66U100264JJ****		.236	.590	3.9	12.00	8.1	10mm	10 to 90 Lbs.
66U140341JJ****		.236	.590	5.5	15.00	9.5	10mm	10 to 90 Lbs.
66U153392JJ****		.236	.590	6	17.00	11	10mm	10 to 90 Lbs.
66U178396JJ****		.236	.590	7	17.00	10	10mm	10 to 90 Lbs.
66U184434JJ****		.236	.590	7.25	18.50	11.25	10mm	10 to 90 Lbs.
66U203468JJ****		.236	.590	8	20.00	12	10mm	10 to 90 Lbs.
89U057151JJ****		.314	.708	2.25	7.50	5.25	10mm	10 to 150 Lbs.
8AU080194JJ****		.314	.708	3.14	9.60	6.45	10mm	10 to 160 Lbs.
8AU089264JJ****		.314	.708	3.5	12.00	8.5	10mm	10 to 150 Lbs.
89U100268JJ****		.314	.708	3.9	12.00	8.1	10mm	10 to 150 Lbs.
89U107275JJ****		.314	.708	4.25	12.25	8	10mm	10 to 150 Lbs.
89U140341JJ****		.314	.708	5.5	15.00	9.5	10mm	10 to 150 Lbs.
89U150368JJ****		.314	.708	5.9	15.90	10	10mm	10 to 150 Lbs.
8AU153392JJ****		.314	.708	6	17.00	11	10mm	10 to 150 Lbs.
89U184434JJ****		.315	.708	7.25	18.5"	11.25	10mm	10 to 150 Lbs.
89U200468JJ****		.314	.708	7.9	19.90	12	10mm	10 to 150 Lbs.
8AU203468JJ****		.314	.708	8	20.00	12	10mm	10 to 150 Lbs.
89U250568JJ****		.314	.708	9.8	23.75	13.95	10mm	10 to 150 Lbs.
8AU276633JJ****		.314	.708	11	26.50	15.5	10mm	10 to 150 Lbs.
1CU203468JJ****		.393	.866	8	20	12	13mm	100 to 250 Lbs.
1CU292671JJ****		.393	.866	11.5	28	16.5	13mm	100 to 250 Lbs.
1CU350745JJ****		.393	.866	13.77	30.9	17.13	10mm	100 to 250 Lbs.
1CU350725JJ****		.393	.866	13.77	30.9	17.13	13mm	100 to 250 Lbs.
1CU406864JJ****		.393	.866	16	35.43	19.43	10mm	100 to 250 Lbs.
1CU416885JJ****		.393	.866	16.37	36.25	19.88	10mm	100 to 250 Lbs.
51G003913JJ****		.55	1.10	2.28	9.56	7.28	16mm	100 to 565 Lbs.
71G004083JJ****		.62	1.10	2.28	9.56	7.28	16mm	100 to 780 Lbs.
91G100282JJ****		.71	1.10	2.28	9.56	7.28	16mm	100 to 875 Lbs.

**** 4 digit code which references the force in Newtons (lbs. x 4.448 =Newtons)

Example: 150 lbs. force = 667 Newtons or P/N suffix "0667"

P/N 8AU203468BB0667 = .314" Rod x 8" stroke, composite ball joint ends & 150 lbs. of force

"BB" = Composite ball joint end fittings

"JJ" = Metal ball joint end fittings

*Stock Items In Bold

For the SOLUTION TO YOUR GAS SPRING NEEDS

1 - 800 - 214 - 7034