


## Standard Compression Gas Springs with Metal Eye End Fittings

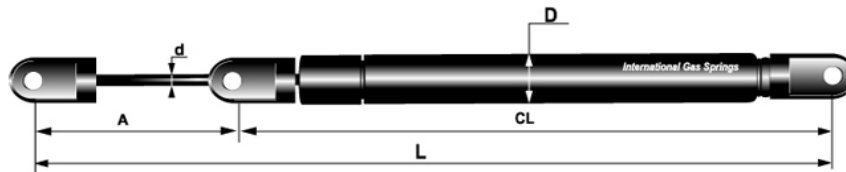

### Features & Benefits

- \*Black Nitride/Chrome Shafts
- \*Available from Stock
- \*End of Travel Dampening
- \*Orbital riveted piston assy.
- \*Selection of Force Ratings
- \*Composite & Steel End Fittings

INCH DIMENSIONS

Gas Spring	P/N	Rod Dia.: (d)	Cyl. Dia.: (D)	Stroke: (A)	Extended Length (L)	Compressed Length (CL)	Eye Diameter	Force (Lbs.)
66U057151MM****		.236	.590	2.25	7.65	5.4	8mm	10 to 90 Lbs.
66U060184MM****		.236	.590	2.4	8.81	6.41	8mm	10 to 90 Lbs.
66U076214MM****		.236	.590	3	10.15	7.15	8mm	10 to 90 Lbs.
66U089264MM****		.236	.590	3.5	12.15	8.65	8mm	10 to 90 Lbs.
66U100264MM****		.236	.590	3.9	12.15	8.25	8mm	10 to 90 Lbs.
66U140341MM****		.236	.590	5.5	15.15	9.65	8mm	10 to 90 Lbs.
66U153392MM****		.236	.590	6	17.15	11.15	8mm	10 to 90 Lbs.
66U178396MM****		.236	.590	7	17.15	10.15	10mm	10 to 90 Lbs.
66U184434MM****		.236	.590	7.25	18.65	11.4	10mm	10 to 90 Lbs.
66U203468MM****		.236	.590	8	20.15	12.15	8mm	10 to 90 Lbs.
89U057151MM****		.314	.708	2.25	7.65	5.4	8mm	20 to 150 Lbs.
8AU080194MM****		.314	.708	3.14	9.75	6.61	8mm	20 to 160 Lbs.
8AU089264MM****		.314	.708	3.5	12.15	8.65	8mm	20 to 160 Lbs.
89U100268MM****		.314	.708	3.9	12.15	8.25	8mm	20 to 150 Lbs.
89U107275MM****		.314	.708	4.25	12.40	8.15	10mm	10 to 150 Lbs.
89U140341MM****		.314	.708	5.5	15.15	9.65	10mm	10 to 150 Lbs.
89U150368MM****		.314	.708	5.9	16.06	10	8mm	20 to 150 Lbs.
8AU153392MM****		.314	.708	6	17.95	11.15	8mm	20 to 160 Lbs.
89U184434MM****		.314	.708	7.25	18.65	11.4	8mm	21 to 150 Lbs.
89U200468MM****		.314	.708	7.9	19.79	11.89	8mm	20 to 160 Lbs.
8AU203463MM****		.314	.708	8	20.15	12.15	8mm	20 to 160 Lbs.
89U250568MM****		.314	.708	9.8	23.94	14.11	8mm	20 to 150 Lbs.
8AU276633MM****		.314	.708	11	26.65	15.65	8mm	20 to 160 Lbs.
1CU203468MM****		.393	.866	8	19.24	11.24	8mm	101 to 250 Lbs.
1CU292671MM****		.393	.866	11.5	27.2	15.7	8mm	100 to 250 Lbs.
1CU350745MM****		.393	.866	13.77	31.05	17.28	8mm	100 to 250 Lbs.
1CU406864MM****		.393	.866	16	35.58	19.58	8mm	100 to 250 Lbs.
1CU416885MM****		.393	.866	16.37	36.4	20.03	8mm	100 to 250 Lbs.
51G003913MM****		.55	1.10	2.28	9.56	7.28	16mm	100 to 565 Lbs.
71G004083MM****		.62	1.10	2.28	9.56	7.28	16mm	100 to 780 Lbs.
91G100282MM****		.71	1.10	2.28	9.56	7.28	16mm	100 to 875 Lbs.

\*\*\*\* 4 digit code which references the force in Newtons (lbs. x 4.448 =Newtons)

Example: 150 lbs. force = 667 Newtons or P/N suffix "0667"

P/N 8AU203468BB0667 = .314" Rod x 8" stroke, composite ball joint ends & 150 lbs. of force

"BB" = Composite ball joint end fittings

JJ = metal ball joint end fittings

\*Stock Items In Bold

**For the SOLUTION TO YOUR GAS SPRING NEEDS**

**1 - 800 - 214 - 7034**