




Standard Compression Gas Springs with Plastic Ball Socket End Fittings

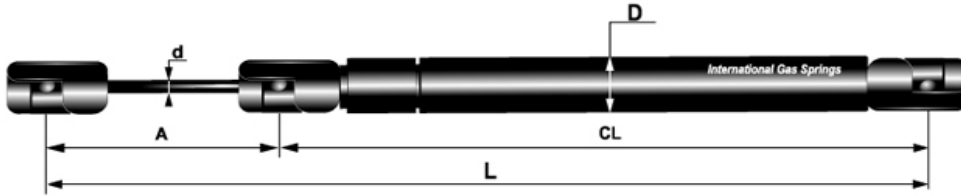

Features & Benefits

- *Black Nitride/Chrome Shafts
- *Available from Stock
- *End of Travel Dampening
- *Orbital riveted piston assy.
- *Selection of Force Ratings
- *Composite & Steel End Fittings

INCH DIMENSIONS

Gas Spring	P/N	Rod Dia.: (d)	Cyl. Dia.: (D)	Stroke: (A)	Extended Length (L)	Compressed Length (CL)	Ball Socket Dia.	Force (Lbs.)
66U057151BB****		.236	.590	2.25	7.50	5.25	10mm	10 to 90 Lbs.
66U060184BB****		.236	.590	2.4	8.66	6.24	10mm	10 to 90 Lbs.
66U076214BB****		.236	.590	3	10.00	7	10mm	10 to 90 Lbs.
66U089264BB****		.236	.590	3.5	12.00	8.5	10mm	10 to 90 Lbs.
66U100264BB****		.236	.590	3.9	12.00	8.1	10mm	10 to 90 Lbs.
66U140341BB****		.236	.590	5.5	15.00	9.5	10mm	10 to 90 Lbs.
66U150364BB****		.236	.590	5.9	15.74	9.84	10mm	10 to 90 Lbs.
66U153392BB****		.236	.590	6	17.00	11	10mm	10 to 90 Lbs.
66U178396BB****		.236	.590	7	17.00	10	10mm	10 to 90 Lbs.
66U184434BB****		.236	.590	7.25	18.50	11.25	10mm	10 to 90 Lbs.
66U203468BB****		.236	.590	8	20.00	12	10mm	10 to 90 Lbs.
89U057151BB****		.314	.708	2.25	7.50	5.25	10mm	20 to 150 Lbs.
8AU080194BB****		.314	.708	3.14	9.60	6.45	10mm	20 to 160 Lbs.
8AU089264BB****		.314	.708	3.5	12.00	8.5	10mm	20 to 160 Lbs.
89U100268BB****		.314	.708	3.9	12.00	8.1	10mm	20 to 150 Lbs.
89U107275BB****		.314	.708	4.25	12.25	8	10mm	10 to 150 Lbs.
89U140341BB****		.314	.708	5.5	15.00	9.5	10mm	10 to 150 Lbs.
89U150368BB****		.314	.708	5.9	15.90	10	10mm	20 to 150 Lbs.
8AU153392BB****		.314	.708	6	17.00	11	10mm	20 to 160 Lbs.
89U184434BB****		.314	.708	7.25	18.5"	11.25	10mm	21 to 150 Lbs.
89U200463BB****		.314	.708	7.9	19.63	11.73	10mm	20 to 160 Lbs.
8AU203468BB****		.314	.708	8	20.00	12	10mm	20 to 160 Lbs.
89U250568BB****		.314	.708	9.8	23.75	13.95	10mm	20 to 150 Lbs.
8AU276633BB****		.314	.708	11	26.50	15.5	10mm	20 to 160 Lbs.
1CU350745BB****		.393	.866	13.77	30.9	17.13	10mm	100 to 150 Lbs.
1CU406864BB****		.393	.866	16	35.43	19.43	10mm	100 to 150 Lbs.
1CU416885BB****		.393	.866	16.37	36.25	19.88	10mm	100 to 150 Lbs.

**** 4 digit code which references the force in Newtons (lbs. x 4.448 =Newtons)

Example: 150 lbs. force = 667 Newtons or P/N suffix "0667"

P/N 8AU203468BB0667 = .314" Rod x 8" stroke, composite ball joint ends & 150 lbs. of force

"BB" = Composite ball joint end fittings

"JJ" = Metal ball joint end fittings

*Stock Items In Bold

For the SOLUTION TO YOUR GAS SPRING NEEDS

1 - 800 - 214 - 7034